

## NRDC4M 4-Cylinder Recovery Unit

### 4-Cylinder for Powerful Recovery

- Up to 40% faster than 2-cylinder unit
- Oversized inlet port for faster recovery

### Large Digital Display

- Easy-to-read large LCD display
- Backlit for clarity

### Brushless DC Motor

- More efficient

### Super-Efficient Condenser



- Over-sized micro-channel coil
- 3 cooling fans

### Dual Oil-Free Compressors

- Suitable for all commonly used refrigerants

### Acceleration Knob Design

- To achieve faster vapor recovery




VERIFIED **Fastest in the Industry**

**MASTER** SERIES



10% Liquid

\* Typically, 90% of time spent during recovery is in vapor recovery stage.

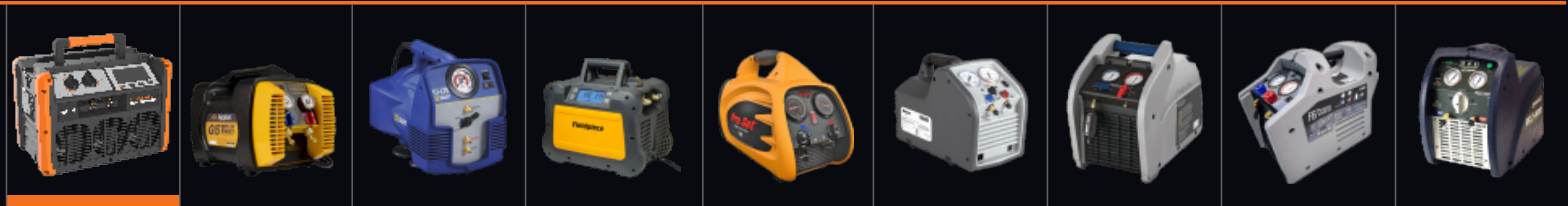

		NAVAC NRDC4M		Appion G5		Yellow Jacket LTE 95730		Fieldpiece MR45		CPS TR600		Robinair Rromax R66		Inflocon Vortex Dual		JB F6		Bacharach Eco 2020	
		LB/min	Kg/min	LB/min	Kg/min	LB/min	Kg/min	LB/min	Kg/min	LB/min	Kg/min	LB/min	Kg/min	LB/min	Kg/min	LB/min	Kg/min	LB/min	Kg/min
R410A	Vapor Rate	<b>Fastest</b> 1.06	0.48	0.55	0.25	0.35	0.16	0.73	0.33	0.70	0.32	0.37	0.17	0.55	0.25	0.48	0.22	0.55	0.25
	Direct Liquid Rate	16.82	7.63	17.16	7.80	9.24	4.20	12.33	5.59	8.05	3.66	7.66	3.48	3.55	1.61	10.56	4.80	5.71	2.59
	Push/Pull Rate	18.23	8.27	20.46	9.30	10.89	4.95	15.92	7.20	31.64	14.38	15.51	7.05	17.39	7.89	15.25	6.93	15.85	7.19
R22	Vapor Rate	<b>Fastest</b> 0.99	0.45	0.62	0.28	0.37	0.17	0.62	0.28	0.60	0.27	0.53	0.24	0.53	0.24	0.55	0.25	0.55	0.25
	Direct Liquid Rate	12.76	5.79	10.34	4.69	6.82	3.10	10.34	4.69	7.35	3.34	9.42	4.28	5.97	2.71	8.00	3.64	6.35	2.88
	Push/Pull Rate	16.76	7.60	16.59	7.54	9.15	4.16	10.08	4.58	31.46	14.30	14.50	6.59	11.00	4.99	15.00	6.82	11.40	5.17
R134a	Vapor Rate	<b>Fastest</b> 0.84	0.38	0.46	0.21	0.35	0.16	0.62	0.28	0.50	0.23	0.37	0.17	0.42	0.19	0.46	0.21	0.46	0.21
	Direct Liquid Rate	9.19	4.17	8.14	3.70	5.35	2.43	6.46	2.93	5.65	2.57	6.42	2.92	4.03	1.83	5.10	2.32	4.52	2.05
	Push/Pull Rate	15.08	6.84	15.84	7.20	6.93	3.15	11.90	5.40	25.61	11.64	11.75	5.34	11.64	5.28	10.41	4.73	10.89	4.94
R407C	Vapor Rate	<b>Fastest</b> 0.99	0.45	0.55	0.25	0.31	0.14	0.73	0.33	0.53	0.24	0.51	0.23	0.55	0.25	0.53	0.24	NA	NA
	Direct Liquid Rate	13.18	5.98	11.90	5.41	7.52	3.42	11.36	5.15	7.14	3.42	7.17	3.26	5.49	2.49	7.81	3.55	NA	NA
	Push/Pull Rate	18.76	8.51	17.58	7.99	10.03	4.56	11.56	5.24	29.08	13.22	14.52	6.60	14.00	6.35	13.51	6.14	NA	NA

Disclaimer: The information found within this chart is not reflective of all competitor products, all trademarks and copyrights on this page are owned by their respective owners. Data was collected from technical specification literature available online and through other publicly available marketing literature, 2021 NAVAC Inc. all rights reserved.